JUST™
REFRIGERATION

UPRIGHT GLASS FRIDGE OR FEEZER

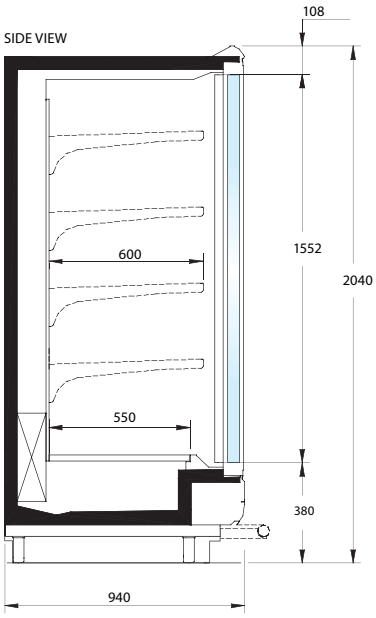

OPTIONAL EXTRAS

- External Colours: Blue, Red, White, Black, Yellow,
- Silver, Grey or Stainless Steel
- Stainless Steel Bumper Rail

FEATURES	
LOW: Running Temperature	-18°C/-20°C · -22°C/-24°C
: Ambient Conditions	25°C - 60% RH
MED: Running Temperature	0°C/+2°C
: Ambient Conditions	25°C - 60% RH

DIMENSIONS	UoM	3P	4P
Length	mm	2343	3124
Width	mm	940	940
Height	mm	Front Glass: 335 · Total Height: 2040	
Thickness of end	mm	50	50
Gross volume	m3	218	291
Total Display area	m²	2,17	2,89
Evaporator Fans	nr.x watt watt	3 x 65 195	4 x 65 260
Lighting	nr.x watt watt	4 x 35 140	5 x 35 175
Antimist Heater	watt	755 (Low) 378 (Medium	
Defrost Heater	nr.x watt	3x950 (Low) 1x950 (Medium)	1x1250 (Low) 1x1250 (Medium)
Nr. Defrost in 24h	nr.x 24h	1/24h-60 min def. +6°C	

LOW TEMP	UoM	3P	4P
Orifice	nr.	TES2or.04	TES2or.05
Refrigeration Capacity (at -35°C)	watt	1790	2380
Rating Power	watt	1182	1550
Daily Electrical Consumption	Kwh/24	26,8	35,3
LOW TEMP	**UoM**	**3P**	**4P**
Orifice	nr.	TES2or.01	TES2or.02
Refrigeration Capacity (at -10°C)	watt	1090	1460
Rating power	watt	805	1050
Daily Electrical Consumption	Kwh/24	16,6	21,9

SABS APPROVED